

# MARTIN® SH 230 Sonic Horn




The **MARTIN® SH 230 Sonic Horn** produces 150 dB at one meter with a frequency of 230 Hz.

### SPECIFICATIONS

Fundamental Frequency (Hertz)	230 Hz	
Output Power Level (Decibels)	150 dB	
Material*	<b>Section A</b>	<b>Section B</b>
	Cast Ductile Iron	Cast Ductile Iron
	Stainless Steel	Stainless Steel
Diaphragm Material	Titanium	
Max Operating Temperature	1200° F (649° C)	
Weight	54 lbs (24.6 kg)	
Air Consumption	80 SCFM @ 80 PSI (38 l/s @ 6.21 bar)	

\*Sonic Horn can be any combination of listed materials.  
Cast Ductile Iron is ASTM A-240. Stainless Steel is ASTM A-395 60-40-18.

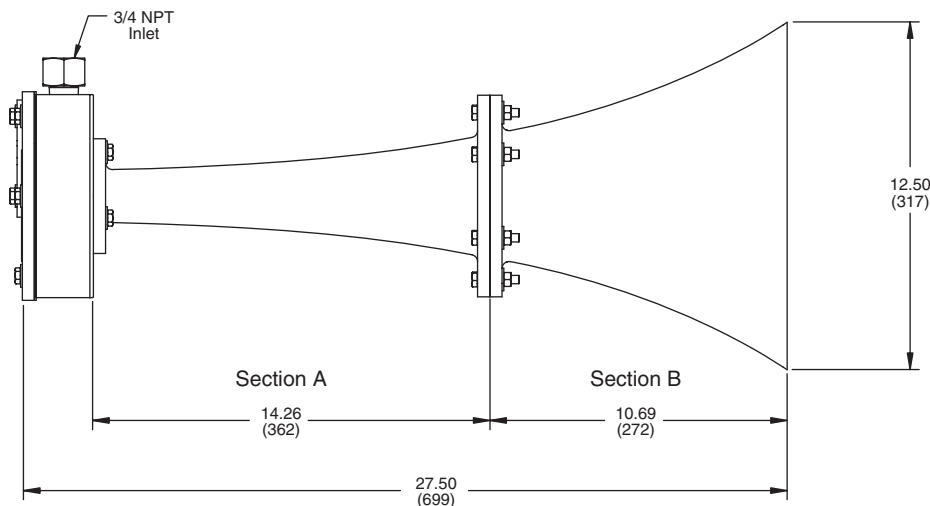

**Martin Engineering USA**  
One Martin Place  
Neponset, IL 61345-9766 USA  
800 544 2947 or 309 852 2384  
Fax 800 814 1553  
www.martin-eng.com

Subject to change without prior notice.  
Quality Management System Certified by DNV - ISO 9001

QUALITY MANAGEMENT SYSTEM  
CERTIFIED BY DNV  
== ISO 9001:2008 ==