

BIG BLASTER® XHV Air Cannon with MARTIN® TORNADO Exhaust Valve


4-INCH VALVE

The **BIG BLASTER® XHV Air Cannon with MARTIN® TORNADO Exhaust Valve** produces better material flow with greater force, faster cycling, and improved safety. The **BIG BLASTER® XHV Air Cannon** fires when the **MARTIN® TORNADO Exhaust Valve** opens in response to a positive surge of air sent by a tripped solenoid valve. This positive-acting valve amplifies the discharge force, up to 20% more force than a standard **BIG BLASTER® XHV Air Cannon** of the same size.



PERFORMANCE DATA

Discharge Time

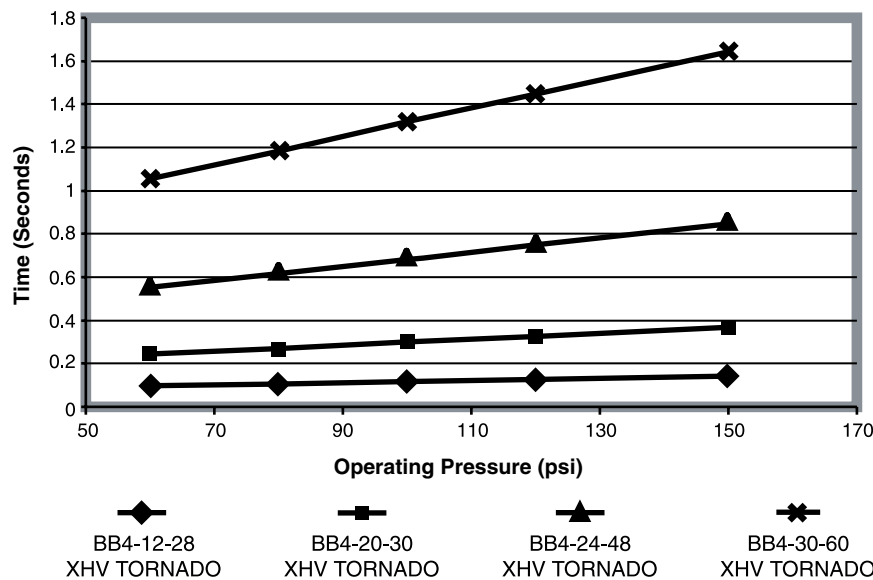

MARTIN® TORNADO Exhaust Valve




Unit shown as cutaway to show internal parts.


BENEFITS

- Increased Safety
- Increased Force Output
- Suitable for High Temperatures
- Easy Installation and Maintenance
- Cycle Guarantee
- Faster Fill Times

Tank Fill Time *

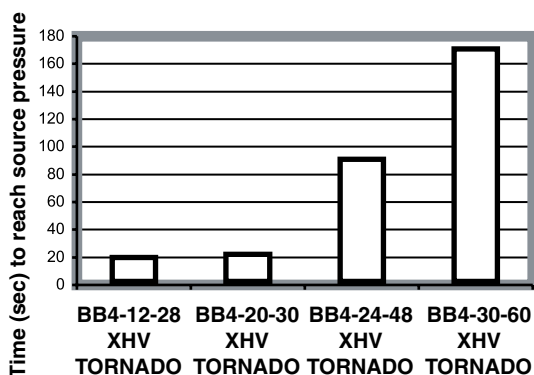

Noise Level

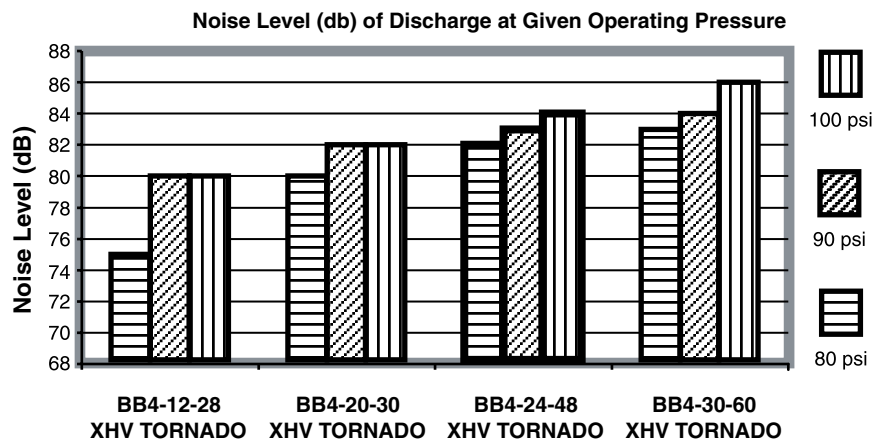

* Data based on laboratory testing. Fill times may vary depending on air supply characteristics.


TECHNICAL DATA SHEET

BIG BLASTER® XHV Air Cannon with MARTIN® TORNADO Exhaust Valve

DIMENSIONS

NPT—National Pipe Thread

Model	Assembly P/N	Dimensions			Ship WT. lbs (kg)
		A	B	C	
BB4-12-28	37798-1228	12 (305)	28.00 (711)	41.65 (1058)	113 (51.25)
BB4-20-30	37798-2030	20 (508)	29.59 (762)	43.24 (1098)	151 (68.5)
BB4-24-48	37798-2448	24 (610)	48.00 (1219)	61.65 (1566)	211 (95.7)
BB4-30-60	37798-3060	30 (762)	60.00 (1524)	73.65 (1871)	312 (141.5)

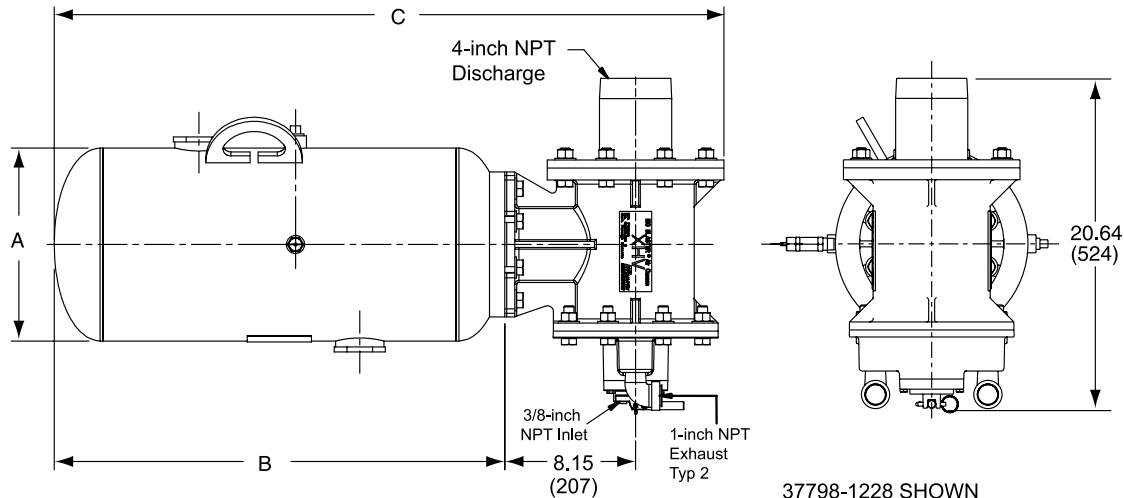

37798-1228 SHOWN

AIR VOLUME IN FT³ (LITERS) FREE AIR

Air Pressure PSI	1228 ft ³ (L)	2030 ft ³ (L)	2448 ft ³ (L)	3060 ft ³ (L)
0	1.7 (47)	4.8 (135)	11.2 (319)	22.0 (622)
40	6.2 (174)	17.7 (501)	41.9 (1185)	81.8 (2315)
50	7.3 (206)	20.9 (593)	49.5 (1402)	96.7 (2738)
60	8.4 (238)	24.2 (684)	57.2 (1619)	111.6 (3161)
70	9.5 (270)	27.4 (776)	64.8 (1835)	126.6 (3585)
75	10.1 (286)	29.0 (822)	68.6 (2052)	141.5 (4008)
85	11.2 (317)	32.2 (913)	76.3 (2160)	149.0 (4219)
90	11.8 (333)	33.9 (959)	80.1 (2269)	156.5 (4431)
95	12.3 (349)	35.5 (1005)	83.9 (2377)	164.0 (4643)
100	12.9 (365)	37.1 (1051)	87.8 (2485)	171.4 (4854)
110	14.0 (397)	40.3 (1142)	95.4 (2702)	186.4 (5277)
120	15.1 (429)	43.6 (1234)	103.1 (2919)	201.3 (5701)

NOTES

Tanks for BIG BLASTER® Air Cannons supplied by Martin Engineering are manufactured to ASME Code Rules, Section VIII, Division 1. Tanks are National Board registered and pressure vessel quality (PVQ).

For further information, contact Martin Engineering at 1-800-544-2947 or visit our website at www.martin-eng.com.



Martin Engineering USA
 One Martin Place
 Neponset, IL 61345-9766 USA
 800 544 2947 or 309 852 2384
 Fax 800 814 1553
www.martin-eng.com

Subject to change without prior notice.
 Patents and patents pendings, ® registered trademark of Martin Engineering Company in the U.S. and other select locations.
 Additional information can be obtained at www.martin-eng.com/trademarks.

QUALITY MANAGEMENT SYSTEM
 CERTIFIED BY DNV
ISO 9001:2008

Problem Solved™

Form No. L3705-07/11
 © Martin Engineering Company 2011